



The InWave Series of indoor antenna systems offered by Wireless Interactive are constructed of UL94-V0 white ABS plastic. The low profile attractive styling blends well in almost any office or home environment. Wall mounting is simple with 4 supplied screws and drywall anchors. The antenna comes with an N Female connector standard.


APPLICATIONS

2.4GHz Wireless LAN
In-Building Wireless Access Points


SPECIFICATIONS

Weight	2.1 lbs (0.8 kg)
Dimensions (L x W x D)	8.5 x 7.5 x 1.77 in (216 x 190 x 45 mm)
Input Return Loss	-14 dB
Antenna Frequency Range	2400-2483 MHz
Gain	10 dBi
Beamwidth	HPOL 110 degrees ; VPOL 30 degrees
Polarization	Horizontal or Vertical
VSWR	≤ 1.5 : 1
Maximum Input Power	100 W
Impedance	50 Ohms

INTEGRATED ANTENNA PATTERNS

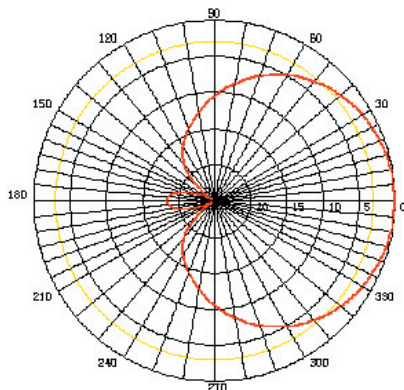

H Plane - Azimuth

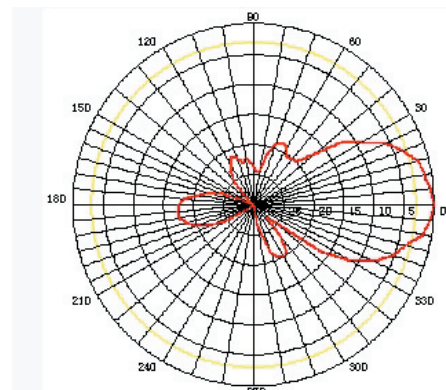

E Plane - Vertical