



The 5dBi WIIN24-5OD is used to extend the range of indoor access points or client bridges in 802.11 2.4GHz wireless LAN environments. With its 5dBi gain, the omni-directional antenna can give up to 50% more range over conventional 2.2dBi rubber duck antennas. The 5 foot cable allows the antenna to be moved away from the wireless equipment for better wireless reception. The antenna features a 360 Degree Horizontal Transmission Pattern and a 28 Degree Vertical Transmission Pattern. The transmit/receive element can be tilted in relation to the base to direct signal where it is needed. The unit has a weighted rubber base to increase stability on the desktop. With its black base and light gray element, it's sleek, aesthetic design is suitable for any desktop application. The unit is supplied with 1.5 Meter (59") of cable terminated with RPSMA, MC Card, MMCX or RP TNC connectors.


APPLICATIONS

- 2.4GHz Wireless Access Points
- In-Building Wireless Access Points
- 2.4GHz Wireless Client Bridges
- 54G Wireless Equipment
- 2.4GHz Wireless Routers
- Laptop wireless cards with external antenna ports


SPECIFICATIONS

Weight	5 oz. (141 g)
Input Return Loss	-14 dB
Antenna Frequency Range	2400-2485 MHz
Gain	5 dBi
Beamwidth	HPOL 80 degrees ; VPOL 60 degrees
Polarization	Horizontal or Vertical
VSWR	≤ 1.5 : 1
Maximum Input Power	10 W
Impedance	50 Ohms
Dimension	3 x 5 in. (76 x 127 mm)
Cable Length	59 in. (1.5 M)

INTEGRATED ANTENNA PATTERNS

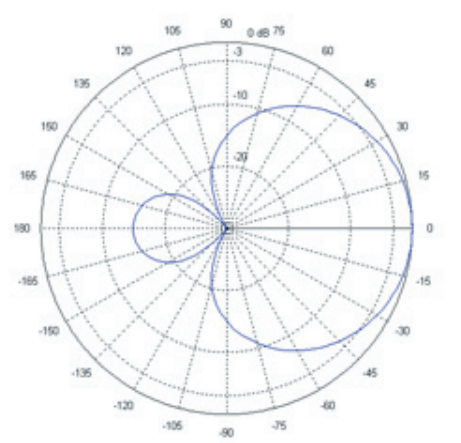

6 dBi Directional - Azimuth

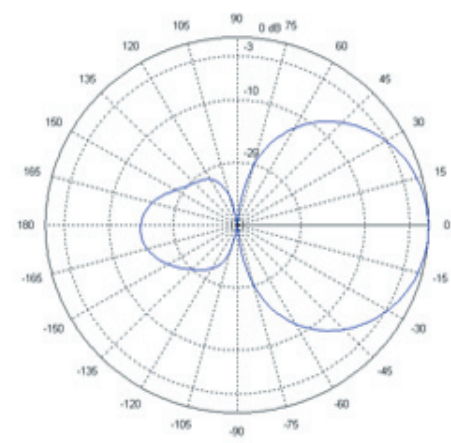

6 dBi Directional - Vertical