




ELECTRICAL SPECIFICATIONS

Frequency Range	4.8 - 5.1 MHz
Gain	16 dBi
VSWR	≤ 2.0
Impedance	50 Ω ± 5 Ω
Polarization	Vertical
Max. Input Power	10 Watts
Beamwidth	H: 120.9° / E: 7.2°

MECHANICAL SPECIFICATIONS

Connector	N-Female
Operating Temperature	-22° ~ +140° F -30° ~ +60° C
Material	Radome: ABS, Fiber Glass Mount: Zinc Alloy
Dimensions (L x D)	24.8 x 5.1 x 2.8 in 630 x 130.6 x 70 mm
Weight	3.2 lbs (1450 g)

H PLANE

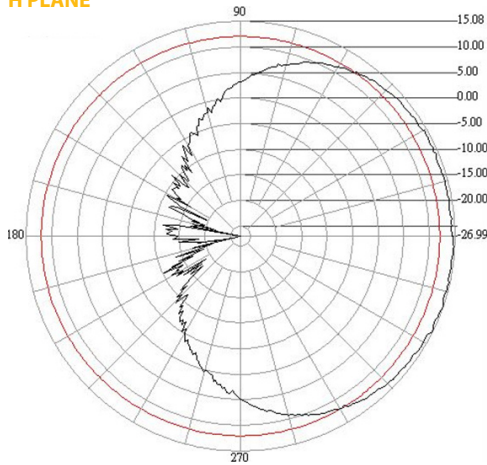

E PLANE

