




The WIRV24-58 Rover Antenna is a high performance wireless antenna that includes its own mounting system for added convenience. The design is flexible enough that you can mount it to the left hand side or right hand side of the screen so that the antenna can be close to your WISRC PCMCIA card , regardless of which side of your laptop it is on.

### SPECIFICATIONS

<b>Weight</b>	2.4 oz (68 g)	
<b>Dimensions (L x Diameter)</b>	6.1 x 0.5 in ( 155 x 12.7 mm )	
<b>Input Return Loss</b>	-14 dB	
<b>Antenna Frequency Range</b>	2400-5825 GHz	
<b>Gain</b>	<b>2400 GHz</b>	3 - 5.5 dBi
	<b>5150 GHz</b>	4 - 5 dBi
	<b>5725 GHz</b>	5 dBi
<b>Beamwidth</b>	HPOL 360 degrees ; VPOL 50 degrees	
<b>Polarization</b>	Horizontal or Vertical	
<b>VSWR</b>	≤ 1.5 : 1	
<b>Maximum Input Power</b>	10 W	
<b>Impedance</b>	50 Ohms	
<b>Connector</b>	MMCX	

### INTEGRATED ANTENNA PATTERNS

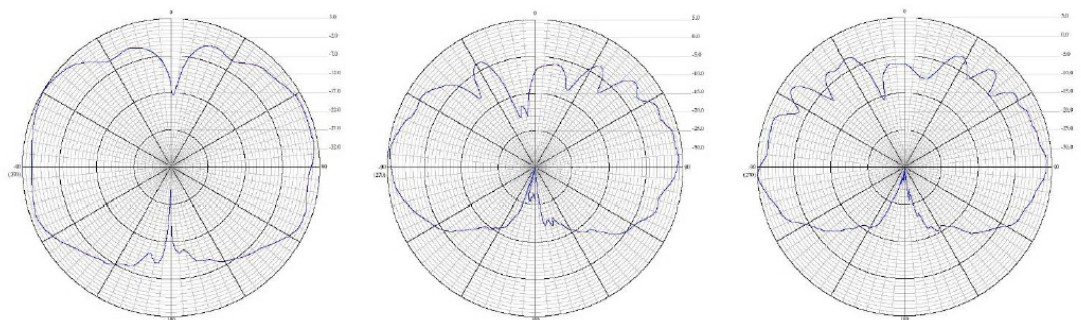

E-Plane Antenna Plots @ 2450, 5150 and 5725 MHz